



Commander SK

General purpose AC drive
for machinery automation

0.25kW - 132kW (0.33hp - 200hp)
100V / 200V / 400V / 575V / 690V



**CONTROL
TECHNIQUES**

www.controltechniques.com

Commander SK, the ultimate general purpose AC drive

Commander SK allows OEMs to add value to their machines whilst also minimising the installed cost. This is achieved through a simple to install, easy to use, yet high performance drive design with integrated features that allow advanced functions to be performed. Commander SK is robust and ideal for industrial automation systems.



Meeting the drive needs of machinery manufacturers

Commander SK is easy and quick to procure, fit and commission, whether installing 1 or 1000 drives.

Fast and easy **procurement**

- Control Techniques offer a single source for motors, soft starters, AC and DC drives and servos
- For high volume customers Control Techniques can integrate into your supply chain using lean distribution methods to minimise stock holding and maximise availability

Fast and easy **installation**

- All drives can be mounted on a flat surface, plus
 - Low power Commander SK drives can click onto standard DIN Rail
 - Commander SK sizes 2 and above can be through panel mounted to allow heat to be dissipated externally. This mounting method allows smaller cabinet dimensions and reduces the need for ventilation
- Integrated features such as EMC filter, PID controller, kW hour meter, integrated brake chopper and onboard PLC option remove the need for many external components

Fast and easy **connection**

- All connectors are generously sized and clearly labelled
- Control connections use screwless push connectors to reduce time required for wiring and increase reliability

Fast and easy drive **set-up**

- Simple keypad and display included as standard
- Sufficient set-up information is detailed on the front fascia of the drive for the majority of applications
- For standardised/high volume manufacture, the SmartStick can be used to transfer drive settings to multiple drives
- For more complex applications, a CD containing detailed documentation and free software tools is included to assist with configuration and monitoring

Fast and easy **support**

- Commander SK is supported through a global engineering network of 53 Control Techniques Drive Centres in 31 countries, plus authorised resellers located within 36 additional countries
- Commander SK is reliable and requires no scheduled servicing
- 2+ year warranty is honoured worldwide no matter where your drive is installed



Commander SK range
0.25kW to 132kW with SK-Keypad Remote

Commander SK - Fast and easy integration flexibility



Typical applications



Communications

Standard

Options

Modbus RTU



SM-EtherCAT



SM-LON



SM-Profibus DP



SM-Interbus



SM-DeviceNet



SM-Ethernet




SM-CANopen



Ethernet/IP,
Modbus TCP/IP,
Email, Web server,
Simple Network
Time Protocol

Installation accessories

EMC filters



These additional filters are designed to operate together with the drive's own integral EMC filter in areas of sensitive equipment

SK Bracket**



Cable management brackets

Cover kit*



The additional top cover kit will increase the environmental protection of the top face to IP4X in vertical direction.

UL type 1 kit*



Bottom metal gland plate, top cover and side covers to allow the drive to comply with the requirements of UL type 1

* Applicable on sizes A to D only. ** Applicable on sizes A to C only. Sizes 2 to 6 have cable management accessories included as standard.



CTSoft

Software which allows the user to monitor, commission and store parameter settings

CTScope

Full featured software oscilloscope for viewing and analysing changing values within drive

SyPTLite

Software used to program PLC functions using the optional LogicStick

CT Energy Savings Estimator

Energy optimising software helps you to calculate pay-back periods and carbon dioxide savings

CT Harmonics Calculator


Supply harmonics calculator will help you to economically meet the required standards for your installation



Plastics



Material handling

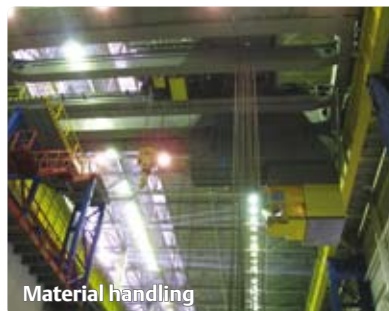

Textiles

Commander SK specifications and dimensions

Specifications


- Automatic no-spin autotune for rapid performance optimisation
- 8 preset speeds available for greater application flexibility
- Keypad access to all parameters – basic and advanced menus
- Open loop vector control. Speed or Torque control
- Speed reference input: 0-10V, 0-20mA, 4-20mA (-10V to +10V SM-I/O Lite option)
- Switching frequency from 3kHz up to 18kHz - quiet motor operation
- Output frequency from 0 to 1500 Hz
- Linear and S type acceleration and deceleration ramps
- Modbus RTU RS485 via RJ45 connector as standard
- DC injection braking as standard
- Dynamic braking transistor as standard
- Energy savings with dynamic motor flux V/Hz
- Fan and pump energy optimisation with quadratic motor flux V/Hz
- Advanced standard software features, such as timers, thresholds, maths blocks, logic operators, PID controller and kW/h meter

Environmental safety and electrical conformance

- IP20
- UL Type 1 kit and cover kit options up to size D
- Ambient temperature -10°C to 40°C
- Electromagnetic Immunity complies with EN61800-3, EN61000-6-1 and EN61000-6-2
- Humidity 95% maximum (non-condensing)
- Electromagnetic Emissions complies with EN61800-3 (second environment) as standard. Complies with EN61000-6-3 (residential) and EN61000-6-4 (industrial) generic standards with optional footprint EMC filter



Dimensions

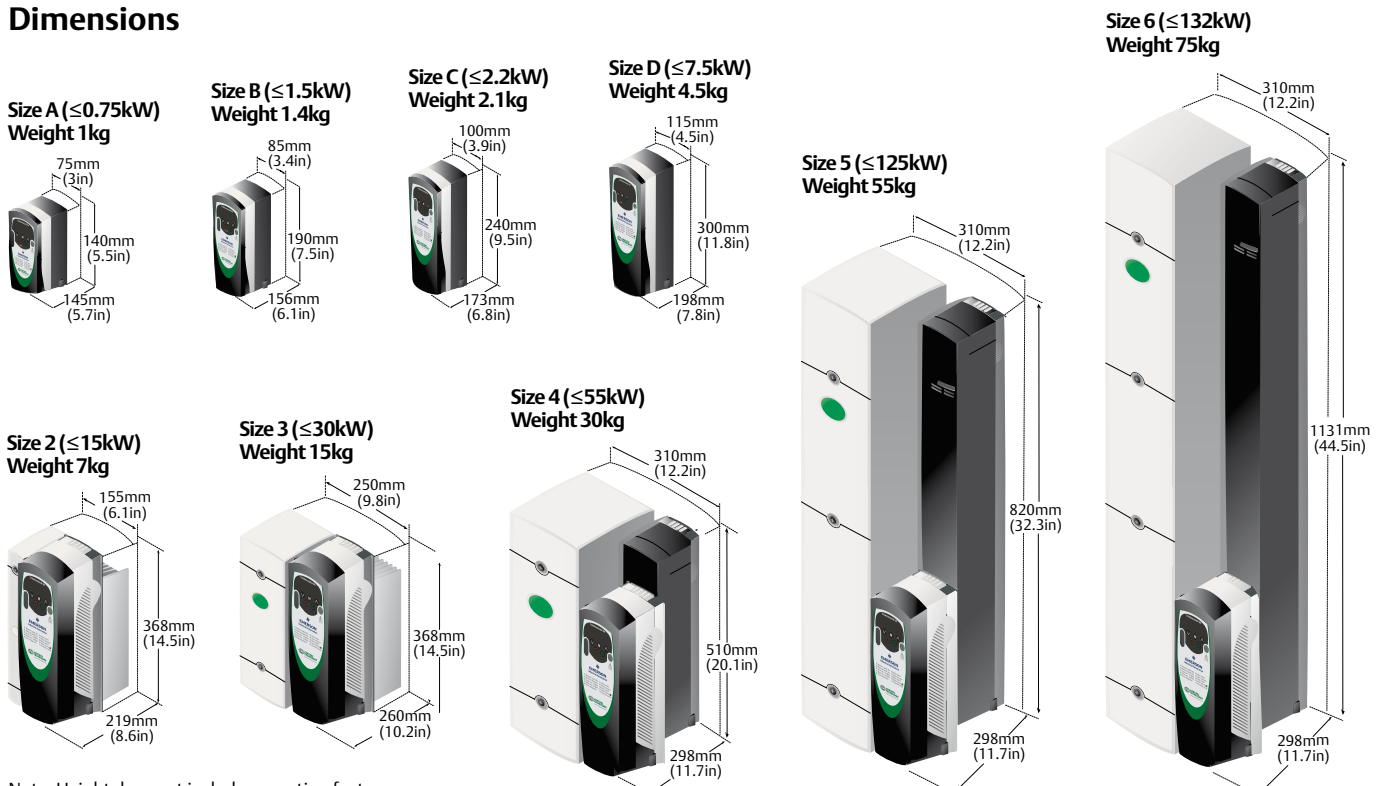

Ratings

Frame Size	100/120 VAC +/- 10% 1 phase (200 / 240 VAC output)	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
A	SKA1100025				1.7	0.25	0.33
	SKA1100037				2.2	0.37	0.5
B	SKB1100075				4	0.75	1
	SKB1100110				5.2	1.1	1.5

Frame Size	200 / 240 VAC +/- 10% 1 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
A	SKA1200025				1.7	0.25	0.33
	SKA1200037				2.2	0.37	0.5
	SKA1200055				3	0.55	0.75
	SKA1200075				4	0.75	1
B	SKBD200110				5.2	1.1	1.5
	SKBD200150				7	1.5	2
C	SKCD200220				9.6	2.2	3
D	SKDD200300				12.6	3	3

Frame Size	200 / 240 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
B	SKBD200110				5.2	1.1	1.5
	SKBD200150				7	1.5	2
C	SKCD200220				9.6	2.2	3
D	SKDD200300				12.6	3	3
	SKD3200400				17	4	5
2	SK2201	15.5	4	5	12.6	3	3
	SK2202	22	5.5	7.5	17	4	5
	SK2203	28	7.5	10	25	5.5	7.5
3	SK3201	42	11	15	31	7.5	10
	SK3202	54	15	20	42	11	15
4	SK4201	68	18.5	25	56	15	20
	SK4202	80	22	30	68	18.5	25
	SK4203	104	30	40	80	22	30

Frame Size	380 / 480 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
B	SKB3400037				1.3	0.37	0.5
	SKB3400055				1.7	0.55	0.75
	SKB3400075				2.1	0.75	1
	SKB3400110				2.8	1.1	1.5
	SKB3400150				3.8	1.5	2
C	SKC3400220				5.1	2.2	3
	SKC3400300				7.2	3	3
	SKC3400400				9	4	5
D	SKD3400550				13	5.5	7.5
	SKD3400750				16.5	7.5	10

Frame Size	380 / 480 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
2	SK2401	15.3	7.5	10	13	5.5	7.5
	SK2402	21	11	15	16.5	7.5	10
	SK2403	29	15	20	25	11	20
	SK2404				29	15	20
3	SK3401	35	18.5	25	32	15	25
	SK3402	43	22	30	40	18.5	30
	SK3403	56	30	40	46	22	30
4	SK4401	68	37	50	60	30	50
	SK4402	83	45	60	74	37	60
	SK4403	104	55	75	96	45	75
5	SK5401	138	75	100	124	55	100
	SK5402	168	90	125	156	75	125
6	SK6401	205	110	150	180	90	150
	SK6402	236	132	200	210	110	150

Frame Size	575 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
3	SK3501	5.4	3	3	4.1	2.2	2
	SK3502	6.1	4	5	5.4	3	3
	SK3503	8.4	5.5	7.5	6.1	4	5
	SK3504	11	7.5	10	9.5	5.5	7.5
	SK3505	16	11	15	12	7.5	10
	SK3506	22	15	20	18	11	15
	SK3507	27	18.5	25	22	15	20
4	SK4603	36	22	30	27	18.5	25
	SK4604	43	30	40	36	22	30
	SK4605	52	37	50	43	30	40
	SK4606	62	45	60	52	37	50
5	SK5601	84	55	75	63	45	60
	SK5602	99	75	100	85	55	75
6	SK6601	125	90	125	100	75	100
	SK6602	144	110	150	125	90	125

Frame Size	690 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
		Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
	Order Code						
4	SK4601	22	18.5	25	19	15	20
	SK4602	27	22	30	22	18.5	25
	SK4603	36	30	40	27	22	30
	SK4604	43	37	50	36	30	40
	SK4605	52	45	60	43	37	50
5	SK4606	62	55	75	52	45	60
	SK5601	84	75	100	63	55	75
	SK5602	99	90	125	85	75	100
6	SK6601	125	110	150	100	90	125
	SK6602	144	132	175	125	110	150

Normal Duty	Heavy Duty
110% overload current for 215 s. For applications which use self-ventilated induction motors and require a low overload capability (e.g. fans, pumps)	150% overload current for 60 s. For constant torque applications which require a high overload capability (e.g. cranes, hoists)

Control Techniques Drive & Application Centres

AUSTRALIA Melbourne Application Centre T: +613 973 81777 controltechniques.au@emerson.com Sydney Drive Centre T: +61 2 9838 7222 controltechniques.au@emerson.com	DENMARK Copenhagen Drive Centre T: +45 4369 6100 controltechniques.dk@emerson.com FRANCE* Angoulême Drive Centre T: +33 5 4564 5454 controltechniques.fr@emerson.com GERMANY Bonn Drive Centre T: +49 2242 8770 controltechniques.de@emerson.com Chemnitz Drive Centre T: +49 3722 52030 controltechniques.de@emerson.com Darmstadt Drive Centre T: +49 6251 17700 controltechniques.de@emerson.com	New Delhi Application Centre T: +91 11 2 576 4782/2 581 3166 controltechniques.in@emerson.com IRELAND Newbridge Drive Centre T: +353 45 448200 controltechniques.ie@emerson.com ITALY Milan Drive Centre T: +39 02575 751 controltechniques.it@emerson.com Reggio Emilia Application Centre T: +39 02575 751 controltechniques.it@emerson.com Vicenza Drive Centre T: +39 0444 933400 controltechniques.it@emerson.com	SINGAPORE Singapore Drive Centre T: +65 6891 7600 controltechniques.sg@emerson.com SLOVAKIA EMERSON A.S. T: +421 32 7700 369 controltechniques.sk@emerson.com SPAIN Barcelona Drive Centre T: +34 93 680 1661 controltechniques.es@emerson.com Bilbao Application Centre T: +34 94 620 3646 controltechniques.es@emerson.com Valencia Drive Centre T: +34 96 154 2900 controltechniques.es@emerson.com	UAE* Emerson FZE T: +971 4 8118100 ct.dubai@emerson.com UNITED KINGDOM Telford Drive Centre T: +44 1952 213700 controltechniques.uk@emerson.com USA California Drive Centre T: +1 562 943 0300 controltechniques.us@emerson.com Charlotte Application Centre T: +1 704 393 3366 controltechniques.us@emerson.com Chicago Application Centre T: +1 630 752 9090 controltechniques.us@emerson.com Cleveland Drive Centre T: +1 440 717 0123 controltechniques.us@emerson.com Florida Drive Centre T: +1 239 693 7200 controltechniques.us@emerson.com Latin America Sales Office T: +1 305 818 8897 controltechniques.us@emerson.com Minneapolis US Headquarters T: +1 952 995 8000 controltechniques.us@emerson.com Oregon Drive Centre T: +1 503 266 2094 controltechniques.us@emerson.com Providence Drive Centre T: +1 401 541 7277 controltechniques.us@emerson.com Utah Drive Centre T: +1 801 566 5521 controltechniques.us@emerson.com
AUSTRIA Linz Drive Centre T: +43 7229 789480 controltechniques.at@emerson.com BELGIUM Brussels Drive Centre T: +32 1574 0700 controltechniques.be@emerson.com BRAZIL São Paulo Application Center T: +55 11 3618 6661 controltechniques.br@emerson.com CANADA Toronto Drive Centre T: +1 905 949 3402 controltechniques.ca@emerson.com Calgary Drive Centre T: +1 403 253 8738 controltechniques.ca@emerson.com CHINA Shanghai Drive Centre T: +86 21 5426 0668 controltechniques.cn@emerson.com Beijing Application Centre T: +86 10 856 31122 ext 820 controltechniques.cn@emerson.com CZECH REPUBLIC Brno Drive Centre T: +420 511 180111 controltechniques.cz@emerson.com	GREECE* Athens Application Centre T: +0030 210 57 86086/088 controltechniques.gr@emerson.com HOLLAND Rotterdam Drive Centre T: +31 184 420555 controltechniques.nl@emerson.com HONG KONG Hong Kong Application Centre T: +852 2979 5271 controltechniques.hk@emerson.com INDIA Chennai Drive Centre T: +91 44 2496 1123/ 2496 1130/2496 1083 controltechniques.in@emerson.com Pune Application Centre T: +91 20 2612 7956/2612 8415 controltechniques.in@emerson.com	KOREA Seoul Application Centre T: +82 2 3483 1605 controltechniques.kr@emerson.com MALAYSIA Kuala Lumpur Drive Centre T: +603 5634 9776 controltechniques.my@emerson.com REPUBLIC OF SOUTH AFRICA Johannesburg Drive Centre T: +27 11 462 1740 controltechniques.za@emerson.com Cape Town Application Centre T: +27 21 556 0245 controltechniques.za@emerson.com RUSSIA Moscow Application Centre T: +7 495 981 9811 controltechniques.ru@emerson.com	SWEDEN* Stockholm Application Centre T: +468 554 241 00 controltechniques.se@emerson.com SWITZERLAND Lausanne Application Centre T: +41 21 637 7070 controltechniques.ch@emerson.com Zurich Drive Centre T: +41 56 201 4242 controltechniques.ch@emerson.com TAIWAN Taipei Application Centre T: +886 22325 9555 controltechniques.tw@emerson.com THAILAND Bangkok Drive Centre T: +66 2962 2092 99 controltechniques.th@emerson.com TURKEY Istanbul Drive Centre T: +90 216 4182420 controltechniques.tr@emerson.com	

Control Techniques Distributors

ARGENTINA Euro Techniques SA T: +54 11 4331 7820 eurotech@eurotechsa.com.ar BAHRAIN Emerson FZE T: +971 4 8118100 ct.bahrain@emerson.com BULGARIA BLS - Automation Ltd T: +359 32 968 007 info@blsaautomation.com CENTRAL AMERICA Mercado Industrial Inc. T: +1 305 854 9515 rsaybe@mercadoindustrialinc.com CHILE Ingeniería Y Desarrollo Tecnológico S.A. T: +56 2741 9624 idt@idt.cl COLOMBIA Sistronic LTDA T: +57 2 555 60 00 sistronic@telesat.com.co	CROATIA Zigg-Pro d.o.o. T: +385 1 3463 000 zigg-pro@zg.htnet.hr CYPRUS Acme Industrial Electronic Services Ltd T: +3572 5 332181 acme@cytanet.com.cy EGYPT Samiram T: +202 29703868/ +202 29703869 samiramz@samiram.com FINLAND SKS Control T: +358 207 6461 control@sk.fi HUNGARY Control-VH Kft T: +361 431 1160 info@controlvh.hu ICELAND Samey ehf T: +354 510 5200 samey@samey.is	INDONESIA Pt Apikon Indonesia T: +65 6468 8979 info.my@controltechniques.com Pt Yua Esa Sempurna Sejahtera T: +65 6468 8979 info.my@controltechniques.com ISRAEL Dor Drives Systems Ltd T: +972 3900 7595 info@dor1.co.il KENYA Kassam & Bros Co. Ltd T: +254 2 556 418 kassambros@africaonline.co.ke KUWAIT Emerson FZE T: +971 4 8118100 ct.kuwait@emerson.com LATVIA EMT T: +371 760 2026 janis@emt.lv	LEBANON Black Box Automation & Control T: +961 1 443773 info@blackboxcontrol.com LITHUANIA Elinta UAB T: +370 37 351 987 sigitas@elinta.lt MALTA Mekanika Limited T: +35621 442 039 mfrancica@gasan.com MEXICO MELCSA T: +52 55 5561 1312 melcsamx@iserve.net.mx SERVITECK, S.A de C.V. T: +52 55 5398 9591 servitek@data.net.mx MOROCCO Cietec T: +212 22 354948 cietec@cietec.ma NEW ZEALAND Advanced Motor Control. Ph. T: +64 (0) 274 363 067 info.au@controltechniques.com	PHILIPPINES Control Techniques Singapore Ltd T: +65 6468 8979 info.my@controltechniques.com POLAND APATOR CONTROL Sp. z o.o. T: +48 56 6191 207 drives@apator.torun.pl PORTUGAL Harker Sumner S.A. T: +351 22 947 8090 drives.automation@harker.pt PUERTO RICO Powermotion T: +1 787 843 3648 dennis@powermotionpr.com QATAR Emerson FZE T: +971 4 8118100 ct.qatar@emerson.com ROMANIA C.I.T. Automatizari T: +40212550543 office@citautomatizari.ro	SAUDI ARABIA A. Abunayyan Electric Corp. T: +9661 477 9111 aec-salesmarketing@abunayyanguangroup.com SERBIA & MONTENEGRO Master Inzenjering d.o.o. T: +381 24 551 605 master@eunet.yu SLOVENIA PS Logatec T: +386 1 750 8510 ps-log@ps-log.si TUNISIA SIA Ben Djemaa & CIE T: +216 1 332 923 bendjemaa@planet.tn URUGUAY SECOIN S.A. T: +5982 2093815 secoin@secoin.com.uy VENEZUELA Digimex Sistemas C.A. T: +58 243 551 1634 VIETNAM N.Duc Thinh T: +84 8 9490633 infotech@nducthinh.com.vn
---	---	---	--	---	--